

# 国分寺市新庁舎建設工事 湧水・地下水調査報告書 (令和5年7月分) (抜粋)

## 1-2 調査位置

本調査の調査位置を図1-2-1に示す。

本調査における観測等は、以下の図1-2-1に示す2箇所(上流地点、及び下流地点)に観測井戸を設け実施する。


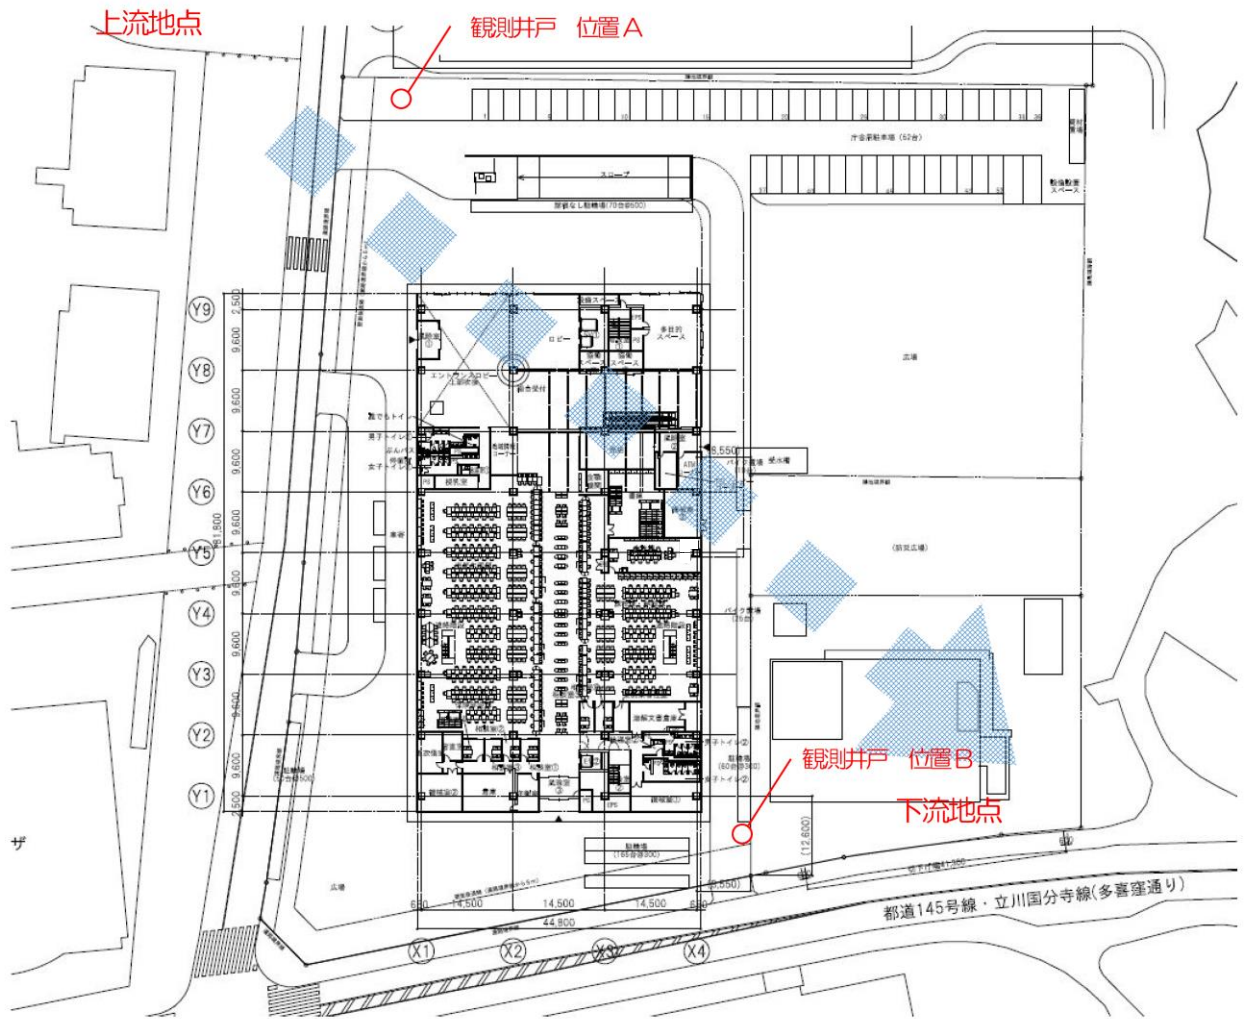


図1-2-1 調査位置

## 2. 調査結果

### 国分寺市新庁舎建設工事 湧水・地下水調査 水質測定、水位観測結果一覧

No.	測定日	No. A							No. B						
		時間	水温 (°C)	pH	電気 伝導率 ( $\mu$ S/cm)	水位			時間	水温 (°C)	pH	電気 伝導率 ( $\mu$ S/cm)	水位		
						塩ビ管 天端-(m)	GL-(m)	TP+(m)					塩ビ管 天端-(m)	GL-(m)	TP+(m)
1	2021/12/23	13:00	17.5	6.41	204.5	14.38	13.46	65.57	15:00	17.1	6.22	163.2	15.06	14.14	64.78
2	2022/1/14	11:14	18.0	6.06	176.9	14.58	13.66	65.37	10:08	16.8	6.34	155.4	15.21	14.29	64.63
3	2022/2/17	10:43	17.5	6.10	174.1	14.83	13.91	65.12	10:07	16.5	6.19	153.3	15.34	14.42	64.50
4	2022/3/14	10:27	19.0	6.11	173.2	14.95	14.03	65.00	10:07	18.5	6.19	155.0	15.41	14.49	64.43
5	2022/4/20	9:42	17.9	5.90	170.7	14.41	13.49	65.54	9:15	17.6	6.14	152.1	15.05	14.13	64.80
6	2022/5/19	10:35	19.5	6.01	177.3	13.86	12.94	66.09	10:07	19.6	6.18	164.3	14.98	14.06	64.86
7	2022/6/13	13:55	20.0	5.92	186.6	13.62	12.70	66.33	13:18	20.4	5.89	168.2	14.76	13.84	65.08
8	2022/7/14	10:44	19.9	5.99	169.7	13.87	12.95	66.09	10:25	18.8	6.09	171.0	14.98	14.06	64.86
9	2022/8/25	10:30	19.4	5.96	169.0	13.87	12.95	66.08	10:08	19.0	6.11	160.9	14.99	14.07	64.85
10	2022/9/21	10:30	19.5	5.98	171.6	13.62	12.70	66.33	10:07	18.7	6.13	178.0	14.70	13.78	65.14
11	2022/10/19	10:34	18.8	6.06	172.0	13.61	12.69	66.34	10:08	18.5	6.21	166.6	14.74	13.82	65.10
12	2022/11/18	10:15	19.1	6.09	169.8	14.38	13.46	65.57	11:17	18.7	6.04	162.4	15.09	14.17	64.75
13	2022/12/20	10:50	18.0	6.16	156.7	14.57	13.65	65.38	10:25	16.5	6.14	165.2	15.22	14.30	64.62
14	2023/1/20	10:36	18.4	6.19	159.5	14.75	13.83	65.20	10:08	17.8	6.17	161.1	15.35	14.43	64.49
15	2023/2/16	11:15	18.6	5.94	163.0	14.93	14.01	65.02	10:15	17.1	5.95	145.9	15.39	14.47	64.45
16	2023/3/20	10:30	18.8	6.08	169.2	14.99	14.07	64.96	10:05	17.3	5.81	168.8	15.40	14.48	64.44
17	2023/4/19	10:36	19.0	6.14	171.7	14.72	13.80	65.23	10:07	18.0	6.24	166.3	15.28	14.36	64.56
18	2023/5/16	10:38	19.9	6.06	174.7	14.66	13.74	65.29	10:10	18.1	6.42	163.2	15.23	14.31	64.61
19	2023/6/13	10:40	19.0	5.95	176.1	13.42	12.50	66.53	10:06	18.2	6.12	171.8	14.40	13.48	65.44
20	2023/7/19	13:40	20.2	6.00	173.5	13.88	12.96	66.07	13:13	19.9	6.29	173.4	15.02	14.10	64.82
21															
22															
23															
24															
25															

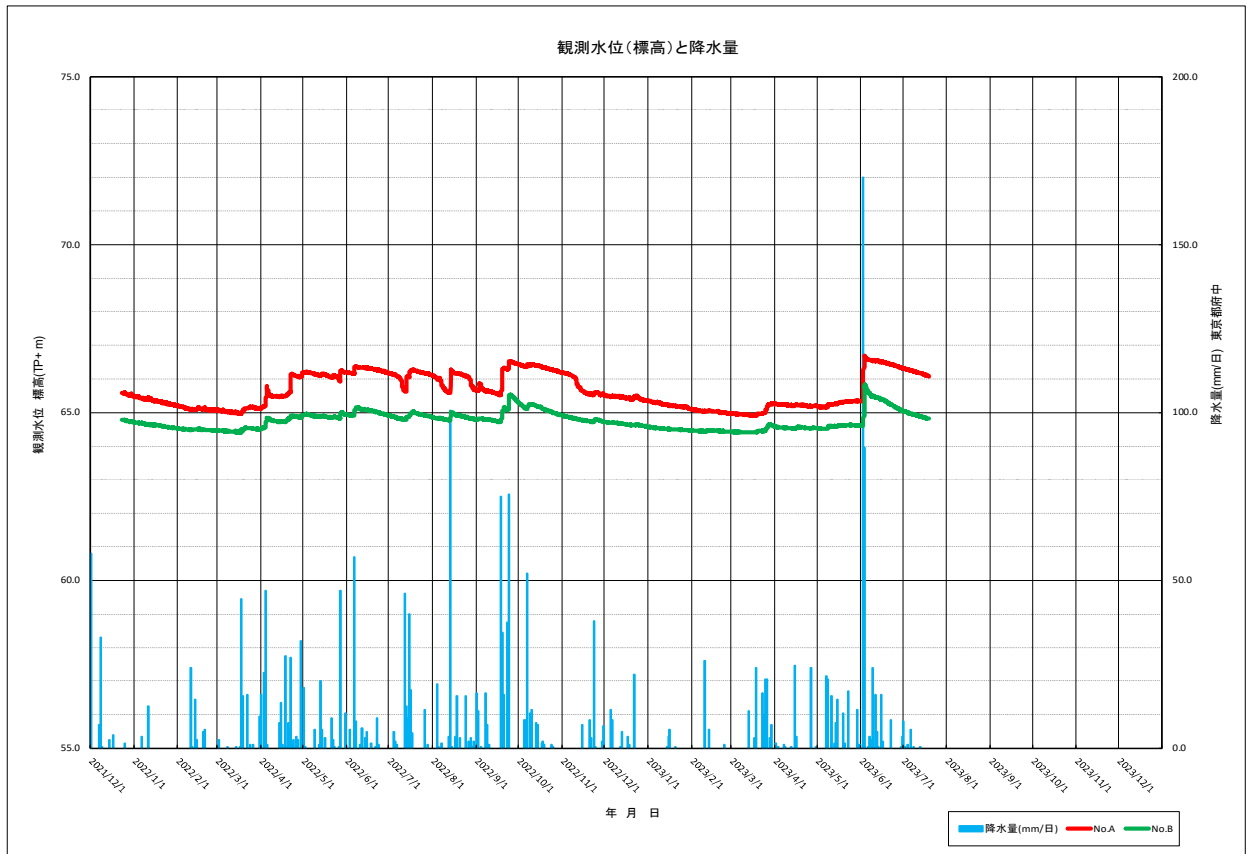

国分寺市新庁舎建設工事 湧水・地下水調査 地下水位観測結果図(No.A、B 標高) (2023/7/19現在)